





Meditime 4505 Tan

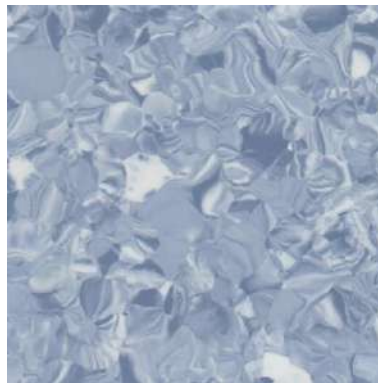


Meditime 4515 Light Blue

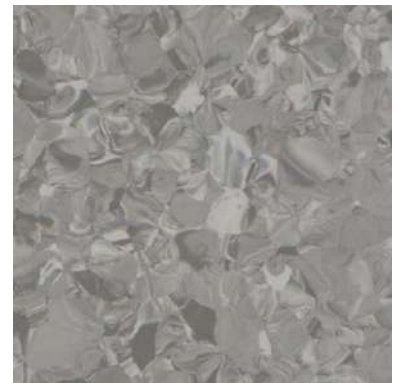

Meditime 4529 Dark Grey



Meditime 4502 Beige

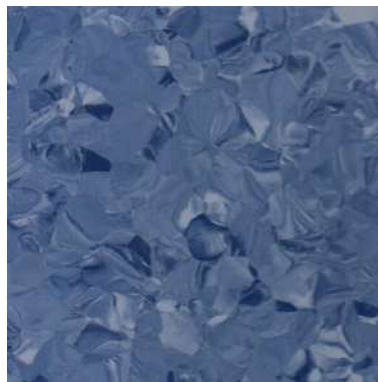

Meditime 4517 Dark Blue



Meditime 4530 Charcoal Grey



Meditime is a durable, multi-purpose homogeneous vinyl flooring with non-directional designs. It is an ideal solution for heavy traffic areas such as healthcare, education, retail, offices and public buildings. Meditime has a surface treated with PUR reinforcement, which means no wax and no polish for life and excellent life cycles costs. The PUR also provides a good base for future maintenance procedures.



- Homogeneous structure- suitable for heavy traffic areas
- Anti-bacterial and fungicidal
- Antistatic properties
- PUR coating-easy low cost maintenance

## INSTALLATION

Meditime homogenous vinyl should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using the matching weld rod.

## MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

## TECHNICAL DATA

### DESCRIPTION

Total Thickness	EN 428	mm	2.0mm
Wearlayer Thickness	EN 429	mm	2.0mm
Weight	EN 430	g/m <sup>2</sup>	2950g/m <sup>2</sup>
Roll width	EN 426	cm	200cm
Roll length	EN 426	m	20m

### CLASSIFICATION

Classification	EN 685	class	34-43
Fire Rating	NF P 92-506	--	M2
	EN 13 501-1	--	Class B <sub>n</sub> - s1
	ASTM E648	--	Class 1
	GB 8624-2006	--	GB 8624 B1
Toxic Testing	GB 18586-2001	--	Pass
Electrical Resistance	EN 1815	kv	< 2
	EN 1801	Ω	≥10 <sup>9</sup>
Slip Resistance Dry	EN 13893	--	≥0.3
Slip Resistance Wet	DIN 51130	--	R9

### PERFORMANCE

Abrasion Group	EN 649	--	Group T
Dimensional	EN 434	%	≤0.40
Residual Indentation	EN 433	mm	0.03
Thermal Conductivity	EN 12 524	W/(m.K)	0.25
Colour Fastness	EN ISO 105 - B02	degree	≥6
Chemical Resistance	EN 423	--	Good
Castor Wheel Test	EN 425	--	Suitable
Impact Sound Reduction	EN ISO 717 / 2	dB	Approx.+4
Flexibility	EN 435	--	Excellent
Anti - Bacterial and Fungicidal	MRSA	--	Good
	DIN EN ISO 846-A/C	--	Good
Surface Treatment			PUR
Underfloor Heating		°C	Suitable Max. 28

### CE MARKING



EN 14041



Disclaimers: Colors may differ from dye lot to dye lot within tolerance. please take note of the dye lot number on the roll before installing.